


ROJECO

Automatic Cat Feeder with Camera

User Manual

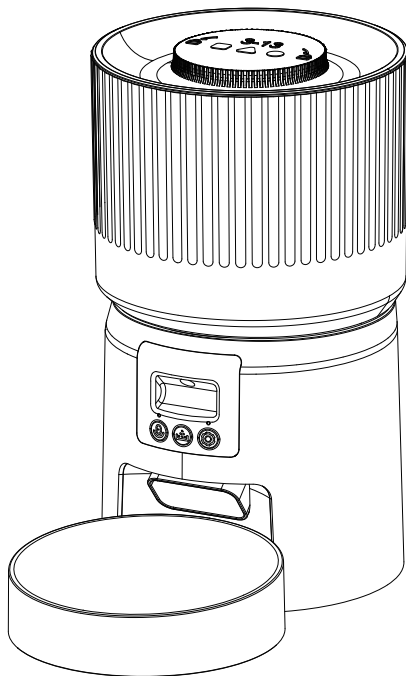


Model: PB-F01

Please read this manual carefully before use.

1. Product Description


Front View

1. Lid
2. Food Tank
3. Rotor
4. Operation Button
5. Food Outlet
6. Bowl Tray
7. Stainless Steel Bowl
8. Tank Base
9. Camera
10. Lid Lock

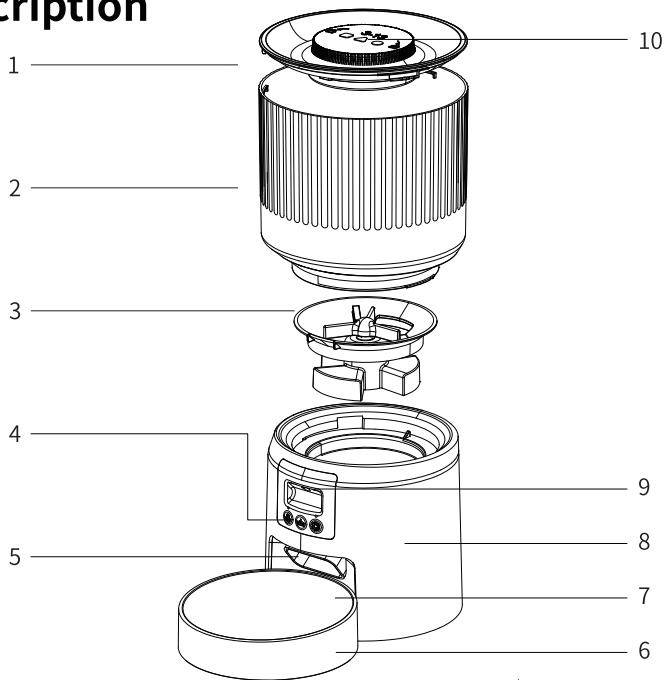


Bottom View

11. Battery Compartment
12. DC Power Port

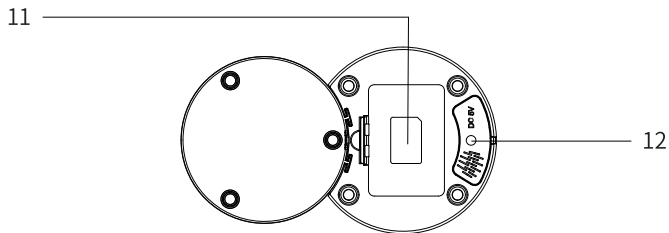


2. How to Install

1. Remove the machine and all accessories.

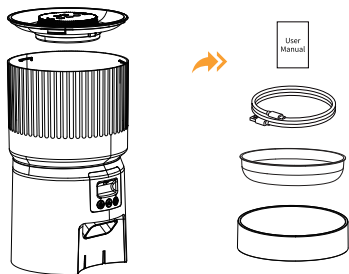


3. Install the impeller by correctly positioning it within the main unit base as illustrated.

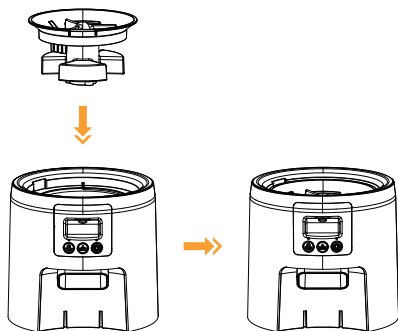


2. Connect the device to the power cord and adapter.

If required, install three size D alkaline batteries (not included) to ensure operation during power outages.

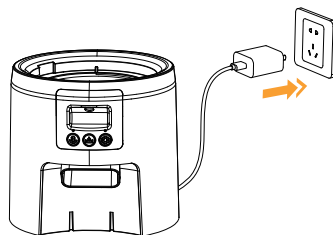


4. Install the food tank.

Place the food tank into the corresponding clip rail as shown in the diagram, aligning it with the mark. Rotate clockwise from position ① to ② until you hear a click, securing it tightly.

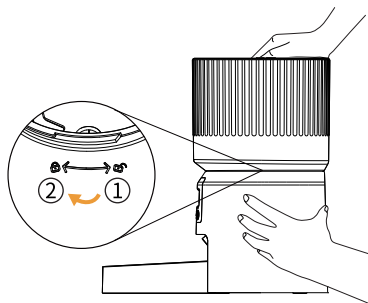


5. Place stainless steel bowl into the food tray. Lift feeder and slide the holder into the groove on the bottom of the feeder.

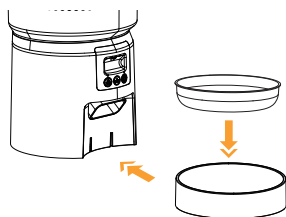

6. Fill the food tank with your pet's favourite dry kibble. Position the lid facing downwards towards the tank's locking mechanism, then turn it clockwise to secure the lid.

Note: Suitable for dry food with kibble size ranging from 3-13mm (0.11-0.51in) in diameter. Larger kibble may get stuck at the food outlet.

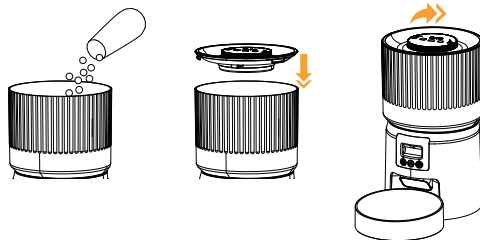

3. LED Display

Voice Recording Button

Press and hold the button; a single "beep" will indicate recording has begun. Release the button, and two "beeps" will confirm the recording is complete. The maximum recording time is 10 seconds.



Reset Button

Long press for 6 seconds until a "beep" sounds to restore factory settings. After resetting, the device can be reconfigured for network access.
Note: When device malfunctions occur (low battery, motor stall), the app will send fault alerts.

Feeding button

Manual feeding: Short press for one portion.
Lock/Unlock: Long press for 4 seconds, a single "beep" indicates locking, while two "beeps" confirm unlocking.

4. Indicators Lights

Status Indicator	Action	Meaning
White	Flashing	Waiting for network connection
	Always on	Successful networking
Red	Fast flash	Software upgrade anomaly
	Slow flash	Low battery/Motor stalled

5. How To Set Pet Feeder

Preparation Process

- System: iPhone ios system 9.0 or above; Smartphone Android system 4.4 or above.
- Mobile phone should connect with WiFi.
- The WiFi password is composed of no more than 12 digits and letters.No special symbols are supported. Do not use Chinese.
- Make sure Bluetooth and Location Services "on" on your phone.
- Please keep the feeder close to the WiFi router . The distance between pet feeder and WiFi router doesn't exceed 33ft/10m and there is no wall barriers between them.

Download APP & Login

- Scan the QR code or search for "ROJECO" on App Store or Google Play to download the app.



ROJECO






App Store



Google Play

- Sign up or Login your account.




Note: APP language depends on your mobile default language.

Power on the Device



Power on the device, turn on the WiFi and Bluetooth of your mobile phone, and wait for the device to start up and then you can carry out the network distribution after hearing the network distribution beep.

Add Device


① Bluetooth Quick Configuration




1. Click the "Add Device" button on the home page, or click the "+" sign in the upper right corner and then select "Add Device" to configure.



2. After adding devices, the app will automatically search for nearby devices, click "Add". Select WiFi and fill in the correct password, confirm and click next.




3. You can select the device you want to add, wait for the device to be configured successfully, then click the button below to finish.






4. After successfully adding the device, it will automatically jump to the home page and enter the control panel interface of the device.

② QR Code Configuration

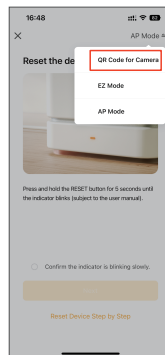

1. Click Add Device, select "Small Home Appliances" on the left side, and find "Pet Feeder with Camera (Wi-Fi)".

2. Confirm that the top-right corner of the network allocation method is "QR Code for Camera", tick the box and click Next after you hear the network allocation beep from the device.

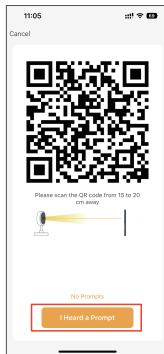



3. Select the connected WiFi and fill in the correct password, confirm and click "Next".

4. Point the QR code of your mobile phone to the lens of the device at a distance of about 15-20cm, and click "I Heard a Prompt" when the device emits a beep.




5. Wait for the successful configuration, the interface of adding device will pop up, click "Done". If the connection fails, restart the device and try again.

③ AP Hotspot Configuration



1. Click Add Device, select "Small Home Appliances" on the left side, and find "Pet Feeder with Camera (Wi-Fi)".

2. Click the upper right corner to switch the network mode to "AP Mode", and click to confirm the indicator light blinks "slowly".

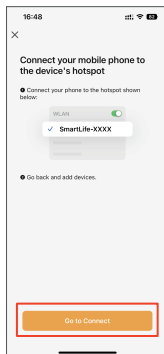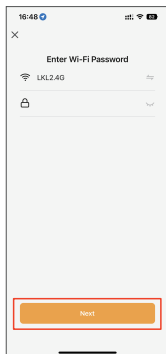

3. Select the WiFi you want to connect to and fill in the correct password, confirm and click "Next".

4. Click "Go to Connect" button, follow the instruction of APP to connect the WiFi name with the word "SmartLife", then return to the app and wait for the configuration.

5. When the configuration is successful, the interface of adding device will pop up, click "Done". If the connection fails, you can try to restart the device and try again.

Video Interface Display


① Video screen

Click on the home page of the feeder device to enter the control panel interface of the device, which displays the live screen.

1. Signal strength
2. Timestamp display
3. Video clarity: HD, SD can be switched at will
4. Sound: When the sound is turned on, the APP can receive the sound from the device side
5. Video full screen: Switch the live screen to landscape mode




② Bottom Menu Bar

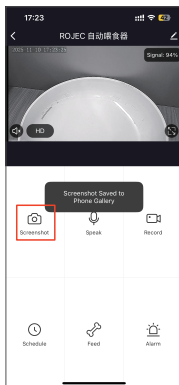

Screenshot


After clicking on the photo icon, you will be prompted to click on it to enter the album to view and share, and synchronise with local albums.

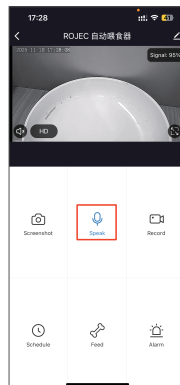

Speak


One-Way Communication: Long press the microphone icon to open and intercom, the device side can receive sound.

Two-Way Talk: Click the phone icon to open the call function, both the device side and the APP side can transmit and receive sound.

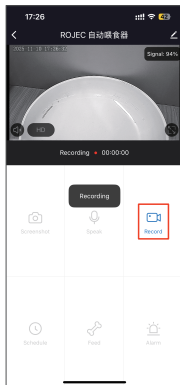

Record

Click on the video icon to open the video recording function after saving a successful prompt, you can click into the phone album to view and share.


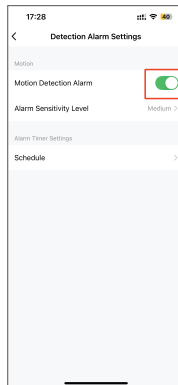


Alarm

Upon activation of the detection alarm switch, the device will trigger an alarm notification when it detects moving objects.


Feeding

① Manual Feeding

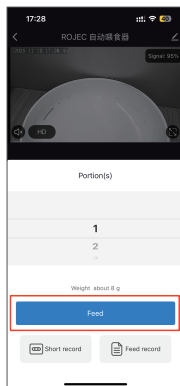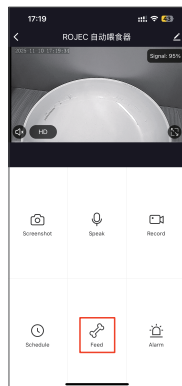

Tap "Feed", select the portion, then tap "Feed".

② Add Meal Plan

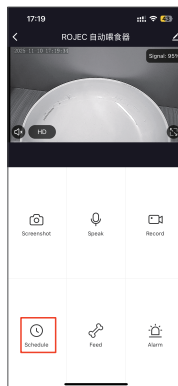

1. Click on "Schedule" to enter the timing page.

	6	7	8	9	10	11	12	1	2	3	4	5
AM			30									
PM			31									

Cycle: Wed Thur Fri Sat >

Numbers: 6 >

2. Click "Add timing" button to add feeding plan.

	1	2	3	4	5	6	7	8	9	10	11	12
AM												
PM												0

Cycle: Everyday >

Numbers: 12 >

3. Set the schedule & portion based on needs. Click "Save" to finish.

③ Add Meal Interface Explanation

8:30

Every Wed.Thur.Fri.Sat.

6

Plan1

8:30(Every Wed.Thur.Fri.Sat.)/6 Portions.

12:00


Every Sun/Mon/Tue/Wed/Thur/Fri/Sat.

12


Plan2

Every Day/12 Portions.

④ Feed Record

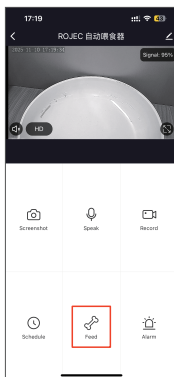


1. Click "Feed".

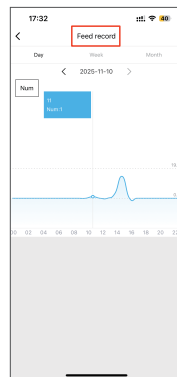


2. Enter "Feed record" page.

Note: After disconnecting your network, machine will keep feeding your pet according to your feeding plan without feeding record.



⑤ Voice Recording

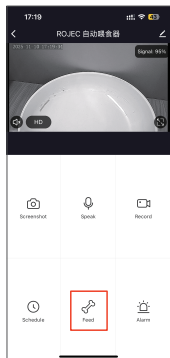

1. Enter the "Feed" interface.

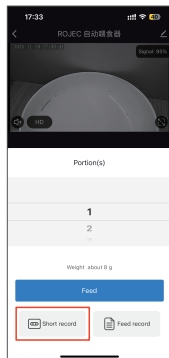


2. Click "Short record" to record, the page prompts "Feeding short sound recording Start recording near the feeding machine", click again to stop and save the recording.

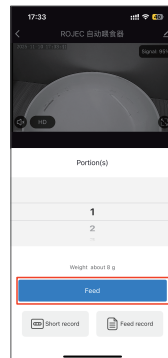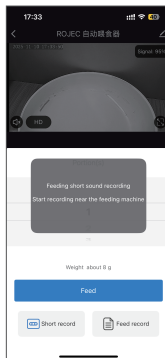



3. When the feeder feeds, the recording will be played automatically.

Setup Functions

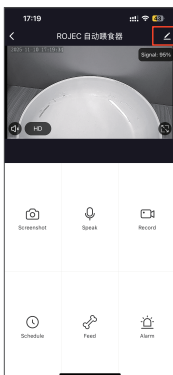


In the upper right corner, click (⚙️) to enter the setting page.

① Talk Mode

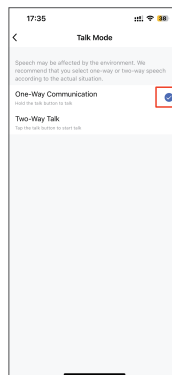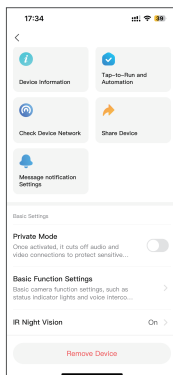


Enter the setting page, click the "Basic Function Settings", click the Talk mode to switch, provide "One-Way Communication", "Two-Way Talk" two ways, return to the real-time video page for intercom.

② Remove Device

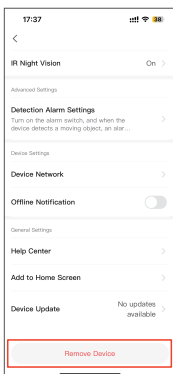

Way 1: Enter the APP home page and long tap the device icon to select the device, then click the "Remove Device" icon.

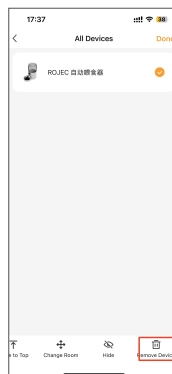


Way 2: Enter the setting page and click "Remove Device", the device will be reset after removing the device, and the data will be cleared after restarting and need to be re-networked.

6. How to Clean


Washable parts.

Note: Do not wash in dishwasher.

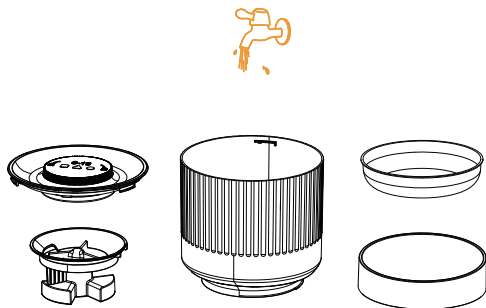

Wipe the main unit.

Note: Do not rinse.



Note: For the health of your pet, cleaning is recommended once a month.

7. Specifications

Model	PB-F01	Capacity	4L
Weight	1.4kg	Material	ABS
Cable length	1.5m	Input	AC 100-240V 50/60Hz
Dimension	308*186*320mm	Dual power supply	DC Power or 3*D Battery (Not included)

8. WiFi Version Troubleshooting

Problem	Solution
Can't configure the feeder on your phone	1) The WiFi account and password is composed of no more than 12 digits and letters. No special symbols are supported. Do not use Chinese. 2) Make sure Bluetooth and Location Services "on" on your phone. 3) Program problem, some Application conflicts may happen. Please restart your mobile.
Feeder appears disconnected from WiFi	Weak disconnection, please check that the distance between your feeder and router is no more than 33ft/10m, and no concrete walls or too many obstacles between them. Otherwise the WiFi network can be weak and cause unstable connection.
The feeder can't dispense food or the feed portion is not accurate	1) Please empty the food bowl before feeding. 2) Please check if the food dispenser outlet is blocked, if yes, fix it before feeding. 3) Clean the battery box and replace with new batteries.
The pet feeder is not working when turned on	1) Please check the power source is working and the powercord is connected properly. 2) Please try to use the battery as power source to check if the pet feeder will work normally. (When the device is powered by battery backup power, you can't use the APP to remote control, but at this time the device still has a memory function and can be feed according to the feeding plan you set.)